

'U' Profile

Reference: **10mm: 252 in mill finish, white and brown in 3m lengths**
 16mm: 253 in mill finish, white and brown in 3m lengths
 25mm: 255 in mill finish, white and brown in 2.5m lengths

Description:

The aluminium 'U' profile fits over the ridge and eaves ends of multiwall polycarbonate glazing. After cutting the glazing sheet to length and width, air should be blown through the flutes to remove dust and swarf. After this process the flutes should be covered with a blanking tape (Ref. PBT) at the ridge end and with an anti-dust breather tape (Ref. FT) at the eaves end. The blanking tape is silver in colour and the anti-dust breather tape is grey.


The tapes are then covered and protected with the aluminium 'U' profile, generally at both ridge and eaves. A bead of silicone can be applied at the eaves end to eliminate the possibility of water entering the U profile.

Condensation may form in the flutes of multiwall polycarbonate, however over time this will drip down the sheet, through the anti-dust breather tape and escape down the drip channel in the U profile.

Applications:

- Protect the closed flutes of multiwall polycarbonate glazing

Dimensions:

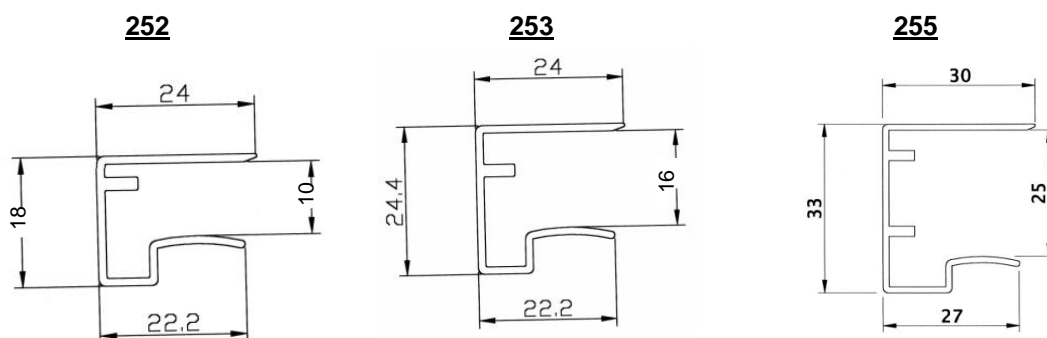

Please note that all information, advice or recommendation is given in good faith and to the best of our knowledge. Due to a policy of continuous improvement we reserve the right to change specifications without prior notice.

UPDS/1-611

©June 2011

