

P501 Rafter Gasket Glazing System

Reference: P501
Colour: White or Brown
Length: 3 metre and 4 metre (6 metre is available as a special)

Description:

An aluminium capped rafter gasket glazing system for installing multiwall polycarbonate glazing.

The P501 system is designed to be fitted onto 50mm wide rafters. It consists of a 50mm wide rafter gasket, a powder coated aluminium cap with gaskets and a push fit end plate.

The rafter gasket is nailed to the rafter using galvanised nails at 300mm intervals, the glazing sheet sits on the rafter gasket and the cap is drilled at intervals no more than 350mm apart. 65mm stainless steel wood screws should then be fitted through the cap into the rafter, a plastic screw cover cap is needed to cover and protect the head of the screw.

The P501 system is supplied as a pre-pack in 3 metre and 4 metre lengths in white and brown.

Hip System

The P501 system is designed for use on lean-to roofing applications only.

Applications:

- Rafter assembly roofing
- Canopies
- Lean-to sunrooms
- Conservatories
- Car ports
- Porches

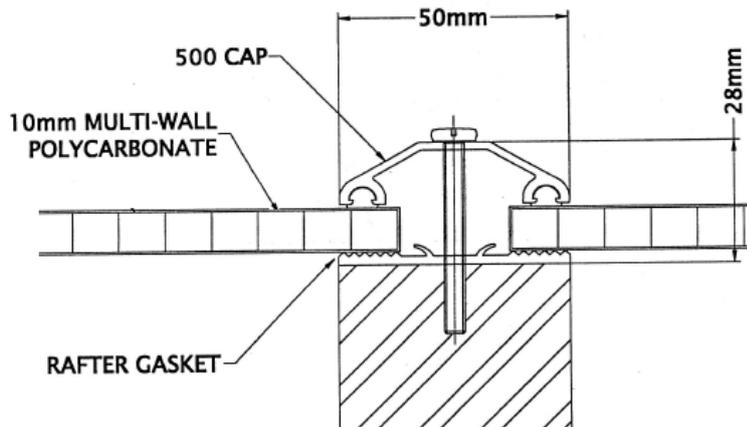
NOTE: The maximum recommended glazing centres for multiwall polycarbonate are:

10mm sheet	=	700 mm
16mm sheet	=	1,000mm
25mm sheet	=	1,250mm

Glazing with Glass

The P501 system is suitable for use with glass. However, we cannot give advice on the width of rafters required or at what centres they should be placed but we do recommend that a mechanically fixed end plate similar to our RGMEP end plate be fitted at the foot of each bar.





The P501 system is used to install multiwall polycarbonate or glass ranging from 4mm to 25mm onto 50mm wide rafters. The P501 is supplied as a pre-pack complete with aluminium cap, gaskets and end plate.



Rafter width: Minimum 50mm

Pack lengths available: 3 metres, 4 metres

Pack contents:
 501 rafter gasket
 one 500 aluminium cap with gaskets fitted
 one 500EP polycarbonate stop end plate

Colours available: powder coated white or brown
 RAL or BS colours to special order

Complementary Fixing Accessories for use with the P501 rafter gasket glazing system:

<p>Side Trim</p>  <p>10mm: Ref 272 16mm: Ref 273 25mm: Ref 275</p>	<p>U Profile</p>  <p>10mm: Ref 252 16mm: Ref 253 25mm: Ref 255</p>
<p>F Profile</p>  <p>10mm: Ref 222 16mm: Ref 223 25mm: Ref 225</p>	<p>Fixing Buttons</p>  <p>10mm White: Ref 244P 10mm Brown: Ref 247P 16mm White: Ref 245P 16mm Brown: Ref 248P 25mm White: Ref 249P 25mm Brown: Ref 250P</p>
<p>Anti-dust/Breather Tape Ref FT10R / FT16R / FT25R Ref PBT10R / PBT16R / PBT25R</p>	<p>Butyl Flashing 200/20 White 200/20 Lead</p>

Please note that all information, advice or recommendation is given in good faith and to the best of our knowledge. Due to a policy of continuous improvement we reserve the right to change specifications without prior notice.